


Wasser Polymer Pvt. Ltd

# FIRE-X 60W

WATER BASED FIRE RETARDANT PAINT

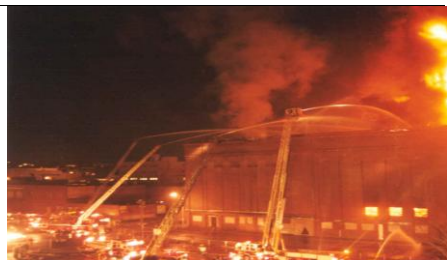

TDS/FX101-60W/020513

## Technical Data Sheet

### Product Description:

A high performance, high build, solvent free water based, intumescent fireproofing coating, designed to be used on wooden and masonry structures, requiring protection from cellulosic fires. Typically applied on site, **Fire-X 60W** will achieve the desired protective thickness in one or two coats, as required. **Fire-X 60W** is designed to give protection to its substrate for one hour at temperature ranging between 700-800 degree centigrade.

### Recommended Use:

To assist in the preservation of structural integrity of wood work and masonry in a cellulosic fire. Typical application areas are hospitals, educational facilities, malls, industrial Complexes, etc.

### Physical Properties :

Colour	..... as per order
Viscosity (B4)	..... 70±10 secs
Specific gravity	..... 1.35± 0.03
Boiling point range	..... 100°C – 208°C
Vapour Pressure Range	.....06 @ 22°C
Vapour Density	..... Heavier than air
Evaporation Rate	..... Slower than water
% Volatile Weight	..... 44.3%
% Volatile Volume	..... 58.7%
VOC (max)	.....3.70 gm/ 100 ml

<b>Thickness:</b>	Thickness of a single coat of <b>Fire-X 60W</b> is around <b>40μ</b> .
<b>Coverage:</b>	Theoretically, 1 ltr of <b>Fire-X 60W</b> covers up to 95-105 sft on wooden surfaces and 90-95 sft on masonry surface.
<b>Drying time:</b>	<b>Surface dry</b> ..... <b>30 mins</b> <b>Hard dry</b> ..... <b>2 1/2 hrs</b>
<b>Surface preparation:</b>	All surfaces to be coated, should be clean, dry and free from loose particles and contamination. The substrate should be primed with a recommended primer.
<b>Application:</b>	<b>Fire-X 60W</b> is a one component coating and should be mixed thoroughly with a <b>power agitator</b> . <b>Spray and Brush application is recommended and this product is not designed for Roller or Dip application.</b>
<b>Clean Up:</b>	All tools, spray guns etc should be cleaned up with water after Application of <b>Fire-X 60W</b> .
<b>Storage:</b>	Typical shelf life of <b>Fire-X 60W</b> is <b>12 months</b> .

*Disclaimer: The informations given in this data sheet are true to the best of our knowledge and based on our lab trials and should not be purported to be authentic, as the methods and areas of applications differ. The user should conduct his own trials and applications before using. The manufacturer is not responsible for any loss or damage arising out of the use of the product.*

Office:  
66, Paikpara Row  
Kolkata 700037  
Phone: 9830105859/ 033- 2556-5629  
Email:wasserpolymer@gmail.com  
May 2, 2013